BT6.33 WARNING SIGN PLACEMENT

Location of signs is as follows and/or as shown on Sale Area Map or other attached drawings.

Sign#	Location
FW11-9-30	FDR 209 (Cottonwood Pass Road); 200 feet east of junction with FDR 742 (Taylor Park Road), facing west.
FW11-9-30	FDR765.1; 200 feet east of junction with FDR 742 (Taylor Park Road), facing west.
W-5-24	FDR 209 (Cottonwood Pass Road); 100 feet west of junction with FDR 209.1D, facing west.
W-5-24	FDR 209 (Cottonwood Pass Road); 100 feet east of junction with FDR 209.1D, facing east.

WARNING SIGN SPECIFICATIONS FOR LOGGING AND ROAD CONSTRUCTION AND MAINTENANCE OPERATIONS

The following is a guide for meeting the intent of BT6.33 SAFETY. This is not a complete list of signs that may be needed. All signs are to be manufactured and installed as specified in MUTCD. In event of conflict, MUTCD standards shall take precedence over the following:

Size:

Standard 30", minimum 24", or as shown.

Shape:

As Shown.

Background: Shall be fully retro-reflective.

Temporary signs shall have an orange background.

Permanently installed signs shall have a yellow background.

Lettering:

Minimum 4" letters, standard alphabet, black, Series "C". Border: ½ inch,


black.


Mounting:

Signs shall be mounted so as to be clearly visible to road user. Signs shall

not be mounted on trees or other sign posts.

Sign Numbers: Sign numbers are from MUTCD. An "F" before the number indicates a Forest Service sign. An "R" or "L" after the number indicates right or left.

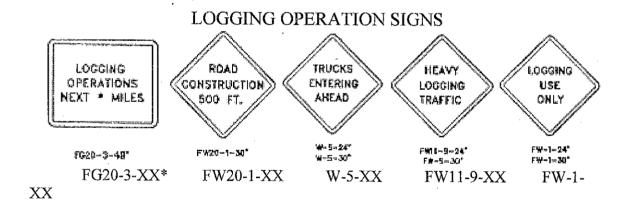

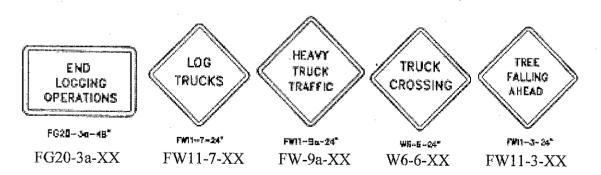

^{*} XX = size of the sign in inches

ROAD CONSTRUCTION AND MAINTENANCE SIGNS







W21−1a Always Orange




W21-3-30" Always Orange




FG20-2-48"

TYPICAL TYPE 3 MOVEABLE BARRICADE

Color: Orange & White. (See MUTCD for length and stripe size.)





SIGN INSTALLATION ILLUSTRATION

